



# Data Sheet

Created :09/12/2008

Revision index R2

**Designation**

**POWER 1.5DC W/CABLE UNIV/24V**  
AC ADAPTER

**reference**

**1870149**

**range**

**Wired basic control**

## FUNCTIONS

The POWER 1.5DC W/CABLE UNIV/24V is a power supply interface for 24V DC Somfy and Stehle motor

Power L.E.D. visible in shadow


Caution : FOR INDOOR USE ONLY



## TECHNICAL SPECIFICATIONS

<b>BOX</b>	Material Color Size Flammability rating Protection factor Weight (net)	plastic white 110 x 53 x 20 (mm) UL94V-0 IP20 250 g
<b>INPUT</b>	Range of supply voltage Frequency No load power consumption Fuse	90-264 V AC 43-67 Hz 0,5 W no fuse (auto-recovery)
<b>OUTPUT</b>	Nominal current for actuator power Voltage Ripple (peak to peak) Total regulation	2,7A 24Vdc SELV < 200mV + / - 5% (22,8V to 25,2V)
<b>POWER SUPPLY SPECIFICATIONS</b>	Type Time before thermal protector trips	SMPS (switching mode pwr supply) NO
<b>STANDARDS</b>	Standards reference Approvals Insulation class	EN60950, UL60950, EN50022 classB CE, UL & CUL listed, TUV, CCC, CB Class II
<b>TEMPERATURE RANGE</b>	Working Storage Rate of humidity relative	0°C to +40°C -20°C to 85°C 95% HR at 30°C
<b>CONNECTORS</b>	Input Output	IEC320 C8 (2P) automatic Plugs

## Dimensions (mm)

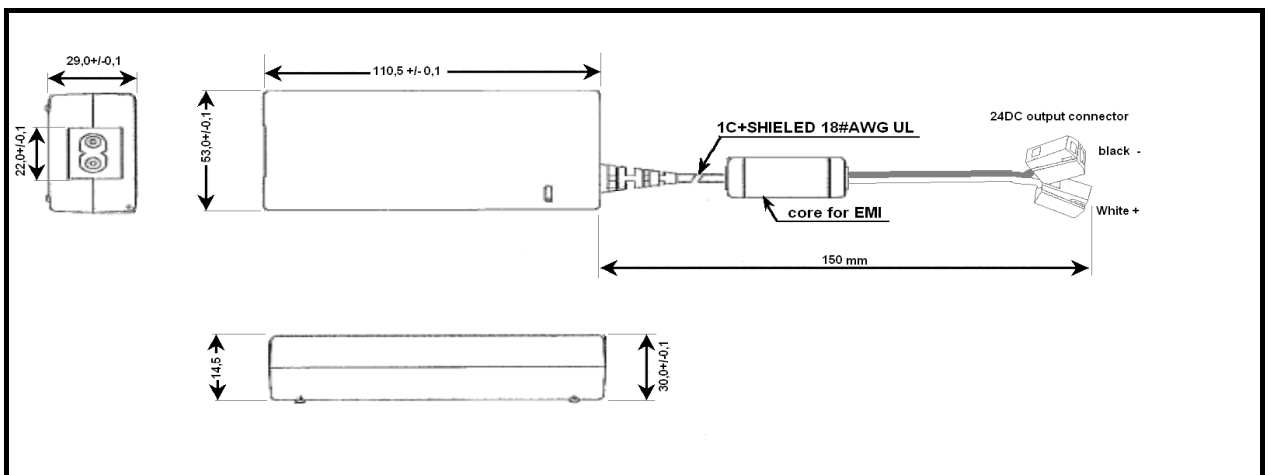

Visa :

<b>Project Manager</b>	Franck Vizier	<b>Quality</b>	Xavier Colet
<b>Technical Leader</b>	Aurele Millet		