

designation	Group control box 3 motors
reference	130150-ST
range	BOX LINE

FUNCTIONS

Relay box which allows group control of up to 3 motors through another control box such as :

CD4, SM1, SL8000n, SL1000n; Basic controls etc.


No individual control available.

Several control boxes can be connected in parallel in order to control more than 3 motors.

**TECHNICAL SPECIFICATIONS**

Box	Material Colour Dimensions	ABS Beige 112 X 52 X 106 mm
	Protection factor against solid and splashproof	IP 40
Supply	nominal limits Frequency	220-240 V~ 198-255 V~ 50 - 60 Hz
Fuse	three fuses	3,15 A-250 V~
Standard		EN-60730 EN 50081 EN 50082
Temperature range	Working Storing	0°C à +40°C -20°C à +70°C
Connectors		screws
Output relays		250 V~ 3.15 A
Electromagnetic compatibility	CEI 1000-4-2 CEI 1000-4-3 CEI 1000-4-4	8 kV lev III lev III
Weight		350g

PRINCIPLE

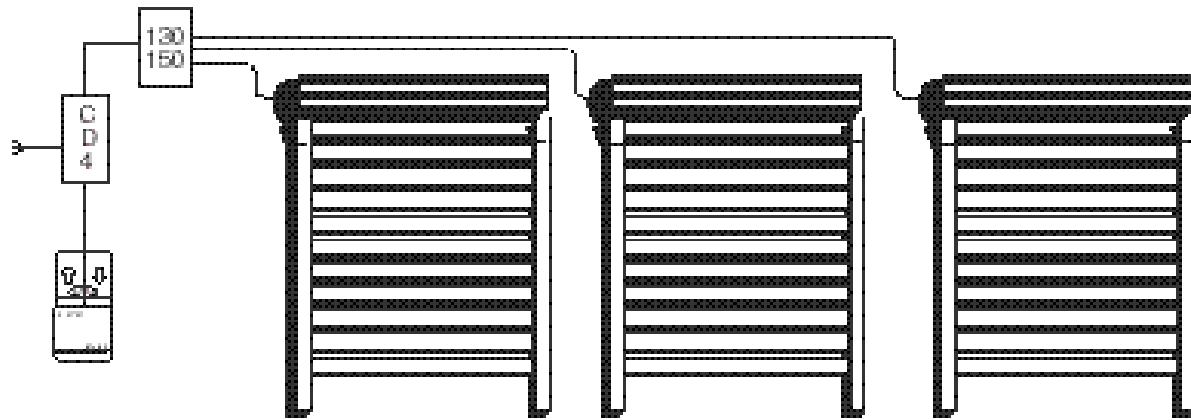

COMPATIBILITIES AT THE 24/03/99

INPUT

CD4 ; SM1; SL8000n; SL1000n; SL2007n; Basic controls

OUTPUT

230V~ motor.

WIRING

