

01 - 03 - 2013


TDST DOC110940

| | |
|--------------------|-----------------------------------|
| Designation | Scenario Player for TaHoma |
| Reference | 1824035 |
| Range | TaHoma Satellite |

FUNCTIONS

- Scenario launcher for TaHoma
- Sensitive Command : 2 scenarios, Stop
- Composition: 1 module, 1 Mounting plate

- Icon Battery life time
- Switch ON/OFF



Module



Support mural

TECHNICAL SPECIFICATIONS

| | | |
|---|---|--|
| Box | Material Color | ABS & PC Pure Shine |
| | Size | Module 50 x 50 x 10 mm |
| | Protection factor against solid & splashproof | IP 30 |
| Battery | Voltage Type Number | 3V CR 2430 x1 |
| Battery lifetime (at ambient temperature in typical conditions) | | 42 months |
| Radio frequency | | 868.95MHz |
| EIRP (Equivalent Isotropically Radiated Power) | | -5 dBm or 0.3mW |
| Modulation Type | | FSK dev. \pm 19.2 kHz |
| Protocol Antenna | | Compatible with TaHoma Integrated |
| Temperature range | Storing Working | -30°C / +70°C 0°C / +60°C |
| Drop test | | Installation: at 0°C 1/face (height : 1,2m) Using: at 20°C 1/face (height : 1,2m) |
| Wear resistivity Cleaning products resistivity | | 50 250 cycles |
| Weight Standard (CE) | | 24g |



Safety of the user : EN EN60950-1 : 2006

Health of the user : EN50371 : 2002

Electromagnetic compatibility : EN61000-6-1 : 2007_EN61000-6-3 : 2007_EN301 489-3 V1.4.1 : 2002_EN301 489-1 V1.8.1 : 2008

Radio Spectrum : EN300220-2 V2.1.2 : 2007_EN300220-1 V2.1.1 : 2006

DESCRIPTION

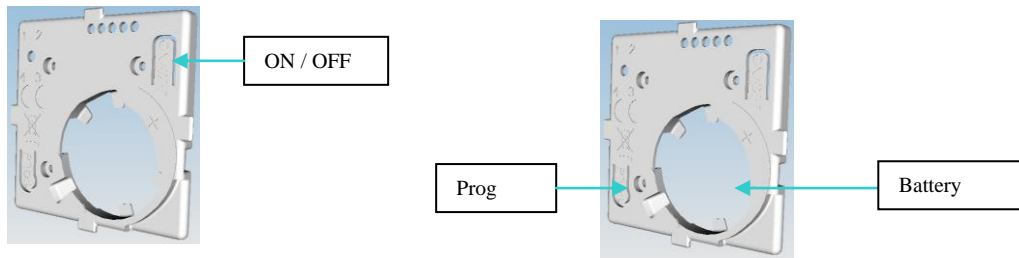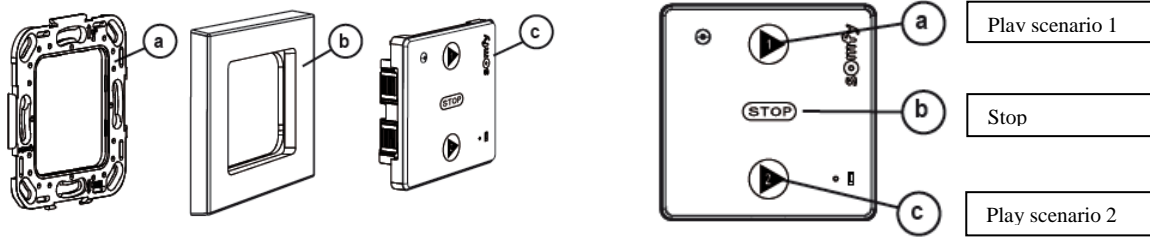


COMPATIBILITIES

Actuators :

- Every equipments compatible with TaHoma

INSTALLATION

Switch ON/OFF

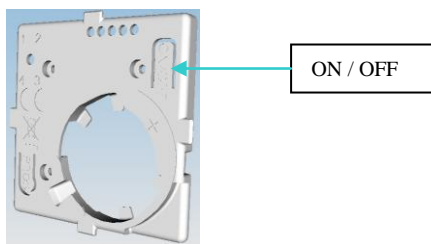

- Press On/Off button to wake up the sensitive pad.

Remark

The prog button is available when the module is OFF

Frame available



Pure



Black



Silver RTS



Silver IO



Light bamboo



Carbonated bamboo



Cherry



Walnut



Double Pure