

**Axroll<sup>NS</sup>**

**Other reference :**

Axroll<sup>NS</sup> Pack confort : 1 841 035  
Axroll<sup>NS</sup> GmbH : 1 841 056

<b>Product reference</b>	1 841 034 (pack standard) 1 841 033 (pack international)
<b>EAN Code</b>	/
<b>Pack dimensions (LxHxD)</b>	16.5x15.5x6.5(cm)
<b>Weight</b>	0.8 (kg)
<b>Pack type</b>	White and violet box
<b>Minimum order</b>	1
<b>Delivery mode</b>	According to delivery (Pallet or box)

<b>Cancels &amp; replaces</b>	Axroll (1 841 017)
<b>Guarantee</b>	30 months
<b>Marketing date</b>	march 2006




**MADE IN Tunisia**

**Pack content**

- 1 Control unit.
- 1 Manual



**Description**


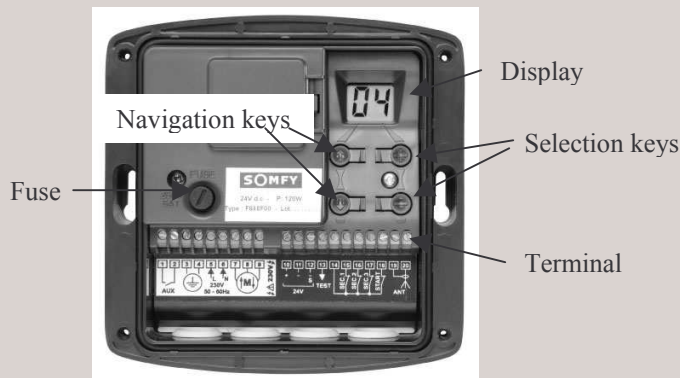


**Technical specification**

<b>Supply</b>	
Power supply	230 Vac / 50-60 Hz 3A
Fuse	5AT 250V
Motor power	230 Vac 750 W max
<b>Box</b>	
Material	GW plast
Color	RAL 7016
Size Box (LxHxD)	150 x 150 x 40 mm
Weight	0.68 kg
Electrical insulation	Class I (the ground must be connected)
Protection rating	IP 55
<b>Accessories</b>	
Accessories power supply	24 Vcc
Orange light max power	10 W (24V) or 40W (230V)
Area lighting	250 Vac, 500 W max
Maximum accessories current	0.33 A or 8W
<b>Miscellaneous</b>	
Ambient operation temperature	-15 to +55 ° C
Radio frequency	433.42 MHz RTS
Number of max. channels	32

**Caution:** the maximum power allowable (orange light + area lightning) is about 500 W



**Wiring and accessories**

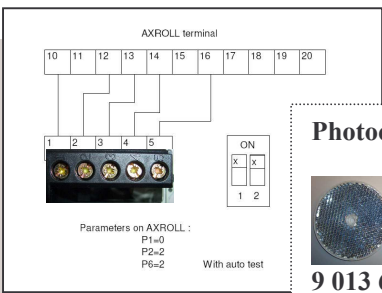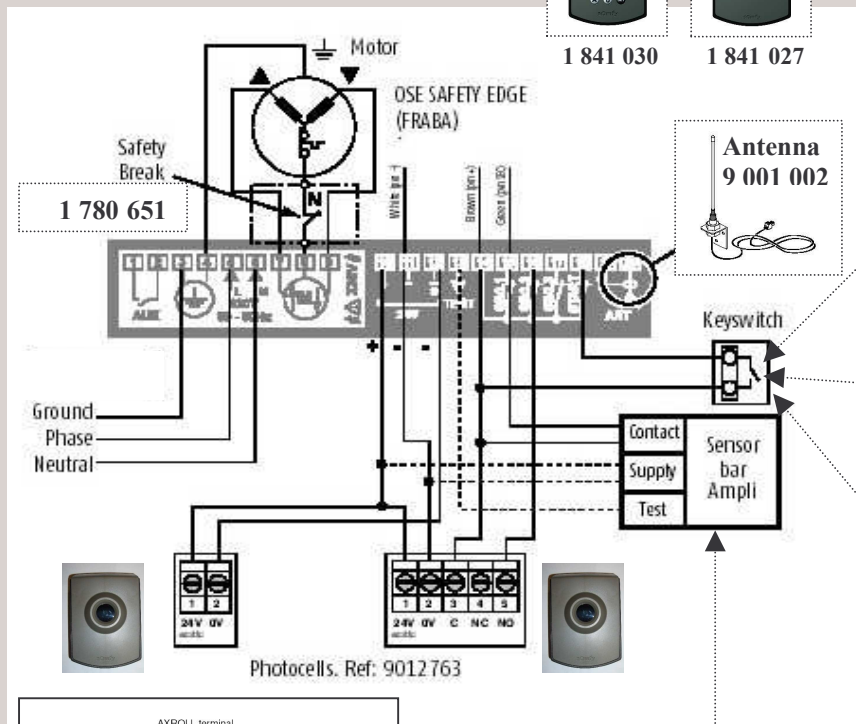

**Safety Edge :**  
**Ultrasonic waves safety edge TSU/TSIU**  
2 height of profile: 110 mm (TSU) and 65 mm (TSIU).

1 Safety edge kit = 1 rubber TSU or TSIU+ 1 aluminum rail + 1 amplifier kit + 1 extensible cord.

Rubber + aluminum rail are referenced for 5 length from 2 m to 6 m or in crown of 25m (rubber) and separate rail → (see catalog)  
Amplifier kit : 2 564 401  
Extensible cord : 2 564 404

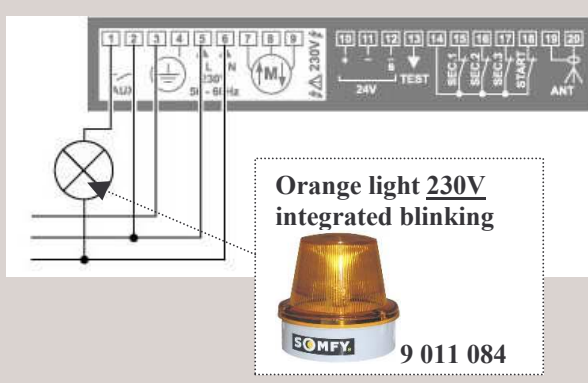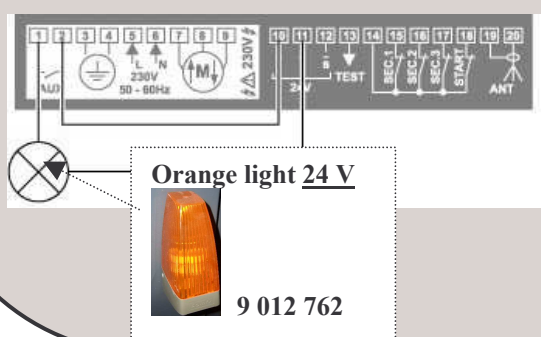

This product complies with the following standard :  
EN 60335-2-95 : Household and similar electrical appliances – Safety. Particular requirements for drives for vertically moving garage doors for residential use.  
When installed in line with the instructions, the product will be compliant with standards EN 13 241-1 and following (EN 12 453).  
SOMFY hereby declares that the device is compliant with the essential demands and other relevant requirements of directive 1999/5/CE.  
A declaration of compliance is available from the web site at [www.somfy.com/CE](http://www.somfy.com/CE) (Axroll<sup>NS</sup>).